

AFOSR TR 96

0404

# ICAM

**FINAL TECHNICAL REPORT**  
**on**  
**GRAPHICAL PRE-AND POST-PROCESSING**  
**FOR SCIENTIFIC COMPUTING**  
**AN AFOSR - DOD DURIP EQUIPMENT GRANT**

**AFOSR GRANT F49620-94-1-0457**  
**for the period**  
**30 September 1994 - 29 September 1995**

**ICAM REPORT 96-02-01**

INTERDISCIPLINARY CENTER FOR APPLIED MATHEMATICS



VIRGINIA POLYTECHNIC INSTITUTE  
AND STATE UNIVERSITY

**DISTRIBUTION STATEMENT**  
**Approved for public release**  
**Distribution Unlimited**

**DTIC QUALITY INSPECTED 1**

Blacksburg, Virginia 24061-0531

**FINAL TECHNICAL REPORT**  
**on**  
**GRAPHICAL PRE-AND POST-PROCESSING**  
**FOR SCIENTIFIC COMPUTING**  
**AN AFOSR - DOD DURIP EQUIPMENT GRANT**  
  
**AFOSR GRANT F49620-94-1-0457**  
**for the period**  
**30 September 1994 - 29 September 1995**


**ICAM REPORT 96-02-01**

**DISTRIBUTION STATEMENT A**

**Approved for public release.  
Distribution Unlimited**

**19960801 101**

# DISCLAIMER NOTICE

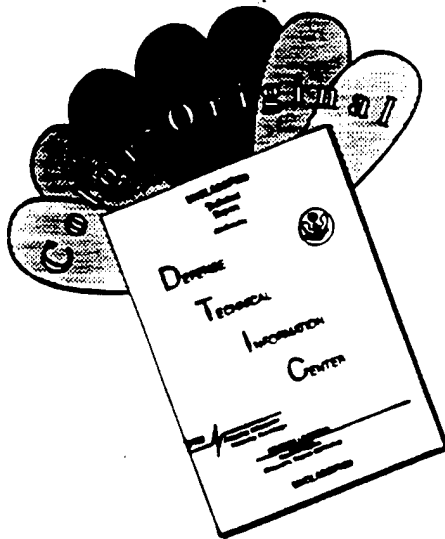

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF COLOR PAGES WHICH DO NOT REPRODUCE LEGIBLY ON BLACK AND WHITE MICROFICHE.

---

**FINAL TECHNICAL REPORT**  
**ON**  
**GRAPHICAL PRE-AND POST-PROCESSING**  
**FOR SCIENTIFIC COMPUTING**  
**AN AFOSR - DOD DURIP EQUIPMENT GRANT**

**AFOSR GRANT F49620-94-1-0457**

**for the period**

**30 September 1994 - 29 September 1995**

**by**

**John A. Burns, Director**  
**Air Force Center for Optimal Design And Control**

**Interdisciplinary Center for Applied Mathematics**  
**Wright House / West Campus Drive**  
**Virginia Polytechnic Institute & State University**  
**Blacksburg, Virginia 24061-0531**

**February 11, 1996**

---

**Prepared for the: Air Force Office of Scientific Research**  
**Mathematical and Computer Sciences - NM**  
**110 Duncan Avenue, Suite B115**  
**Bolling AFB, DC 20332-0001**

## REPORT DOCUMENTATION PAGE

OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 2/11/96		3. REPORT TYPE AND DATES COVERED Final Report, 9/30/94 - 9/29/95	
4. TITLE AND SUBTITLE  Graphical Pre-and Post-processing for Scientific Computing				5. FUNDING NUMBERS  (G) F49620-94-1-0457	
6. AUTHOR(S)  J.A. Burns, E.M. Cliff and M. D. Gunzburger					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Interdisciplinary Center for Applied Mathematics Wright House, West Campus Drive Virginia Polytechnic Institute and State University Blacksburg, Virginia 24061-0531				8. PERFORMING ORGANIZATION REPORT NUMBER  ICAM Report 96-02-01	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  Air Force Office of Scientific Research Code NM Bolling AFB, DC 20332				10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES					
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Unlimited				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  This final technical report contains a summary of the equipment purchased and the research conducted under the AFOSR DURIP Grant F49620-94-J-0457, titled "Graphical Pre-and Post-processing for Scientific Computing", for the period 30 September 1994 to 30 September 1995. During this period, the equipment was used to expand the capabilities of CODAC researchers to develop visualization tools that enhance scientific understanding and facilitate engineering design. Much of the work is concentrated on optimal design and control of systems described by partial differential equations. Therefore, the graphical tools were needed to develop spatial discretizations and associated computational grids. The sensitivity equation method is being applied to various shape optimization and flow tailoring problems. The computational and graphical equipment purchased under this grant is being used to develop an interactive design tools for aerospace systems. The report contains a description of the equipment and a brief summary of some of the on-going research projects that are using this equipment.					
14. SUBJECT TERMS  Optimal Design and Control of Fluids, Scientific Computation, Visualization				15. NUMBER OF PAGES 8	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE  Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT  Unclassified	20. LIMITATION OF ABSTRACT  UL		

# 1 Equipment Purchased

The principal equipment purchased under the grant were

1. four SGI Indigo workstations
2. two HP 1600CM color printers

# 2 Scientific Justification

The equipment purchased under this grant has enhanced our abilities to do fundamental research and has aided in the industrial transition of this work in at least three ways:

1. pre-processing for scientific computations
2. post-processing for scientific visualization
3. development of interactive design tools

## 2.1 Pre-processing for scientific computations

Much of our work is focused on control and design of systems described by partial differential equations. Accordingly, there is a need for spatial discretization and associated computational grids. Furthermore, the geometrical complexity of three-dimensional objects encountered in realistic scientific computations requires substantial preparation of grids before one can enter into the solution phase of a numerical simulation. For example, in [1], we studied optimization of the shape of a forebody simulator (see, [3],[8]), using a flow solver based on *unstructured* grids [2]. Unstructured grids are important in applications, wherein actual boundaries may be irregular.

The computational geometry for the problem is described by a trapezoidal domain with the forebody removed. A typical grid is shown in 1. The boundary conditions are specified in the following way: 1) inflow conditions are applied on the left side and slanted top portion, 2) a simple first order extrapolation outflow is specified for the right side, 3) tangency is applied on the curved forebody, and 4) a symmetry condition is applied on the horizontal boundary preceding the forebody. Modern engineering workstations, such as the SGI Indigo's obtained under this grant, are essential to the efficient

generation of such grids. The ability to display and manipulate these grids is crucial to the timely solution of such flow optimization problems.

## 2.2 Post-processing for scientific visualization

Simulation of the response of distributed systems commonly produces two and/or three-dimensional time-dependent data. Scientific visualization is an emerging discipline that provides tools for representing these responses in ways that help the analyst understand and interpret the results. In [9] we study optimal LQG control of a *driven cavity*. In this problem the goal is to compute optimal feedback functional gains and use the spatial information in these gains to place sensors/actuators for feedback control. It is important to display these functional gains to the analyst so that he can use the visual information to guide the sensor placement, for example. With the feedback controller in hand, one is interested in simulating the response to demonstrate the effectiveness of the control algorithm. In this facet it is useful to generate time varying flows in the cavity, driven by disturbances. The results of these simulation can be animated for presentation on our workstations.

## 2.3 Development of interactive design tools

Advances in computational arts - analysis, software and hardware - have greatly enhanced the process of analyzing proposed design concepts. Such advances have occurred in virtually all engineering disciplines but especially in those related to advanced aerospace systems. While such analysis tools are important, an even bigger payoff awaits the development of advanced tools for design synthesis.

We expect that before formal optimization is adopted as a common tool, it will be useful to produce tools that guide the contemporary designer. For example, in addition to displaying the simulated flow for a current design, one might also provide information about how a specific geometric change will alter the flow. The designer would use this information, along with a notion of his 'goal' to adjust the geometry and simulate a new flow. We have developed numerical procedures for the efficient calculation of certain design *sensitivities* (see, [4], [5], [6]) for high-speed flow problems. In [1] we applied these ideas to a chemically reacting flow problem with five species of air [7], [10] [11]. Shown in 2 is the computed sensitivity for the amount of nitrous

oxide in the flow to the inflow velocity. From such information, the designer can judge the effect of such changes on the flow.

### 3 Educational Component

The Interdisciplinary Center for Applied Mathematics (**ICAM**) was formed in August 1987 to promote and facilitate interdisciplinary research and education in applied mathematics at Virginia Polytechnic Institute and State University. The goal of **ICAM** is to enhance the historical links among mathematics, engineering and the sciences. Core participants in **ICAM** are committed to providing interdisciplinary research experience for both graduate and undergraduate students. The equipment purchased under this grant is available for use by qualified students in their research and in their formal studies.

### References

- [1] Appel, J.R., Godfrey, A. Cliff, E.M. and Gunzburger, M.D., "Optimization-based design in high-speed flows", in *CFD for Design and Optimization*, O Baysal, ed pp 61-68, Presented at ASME International Mechanical Engineering Congress and Exposition, San Francisco, CA, Nov. 1995.
- [2] Applebaum, M.P. and Walters, R.W., *UCFD, An Unstructured Computational Fluid Dynamics Package*, Virginia Tech, Blacksburg, VA, 1995.
- [3] Beale, D.K. and Collier, M.S., "Validation of a free-jet technique for evaluating inlet-engine compatibility," *AIAA PAPER 89-2325*, Presented at 25th AIAA, ASME, SAE and ASEE Joint Propulsion Conference, Monterey, CA, 1989.
- [4] Borggaard, J.T., Burns, J.A., Cliff, E.M. and Gunzburger, M.D., "Sensitivity calculations for a 2D, inviscid, supersonic forebody problem", *Identification and Control of Systems Governed by Partial Differential Equations*, H.T. Banks *et al*, ed., SIAM Publications, Philadelphia, PA, 1993.



- [5] Borggaard, J.T., "The Sensitivity Equation Method for Optimal Design", Ph.D. Dissertation, Department of Mathematics, VPI & SU, Blacksburg, VA, Dec. 1994
- [6] Borggaard, J.T., Burkardt, J.V., Gunzburger, M.D. and Peterson, J.L., Eds., 1995, *Optimal Design and Control*, Birkhauser, Boston, MA.
- [7] Grossman, B. and Cinnella, P., "Flux-split algorithms for flows with non-equilibrium chemistry and vibrational relaxation", *J. Computational Physics*, Vol. 88, pp 131-168, 1990.
- [8] Huddleston, D., "Development of a free-jet forebody simulator design optimization method", *Tech. Rept. AEDC-TR-90-22*, Arnold Engineering Development Center, Arnold AFB, TN, 1990.
- [9] King, B.B. and Ou, Y.R., "Nonlinear dynamic compensator design for flow control in a driven cavity", *Proceedings of the IEEE Conference on Decision and Control*, New Orleans, LA, pp 3741 - 3746, Dec. 1995.
- [10] McGrory, W., Slack, D.C., Applebaum, M.P. and Walters, R.W., *GASP: The General Aerodynamic Simulation Package*, Version 2.2, User's Guide, AeroSoft Inc., Blacksburg, VA, 1993.
- [11] Walters, R.W., Cinnella, P., Slack, D.C. and Halt, D., "Characteristic-based algorithms for flows in thermo-chemical nonequilibrium", *AIAA J.*, Vol. 30, No. 5, pp 1304-1313, 1992.

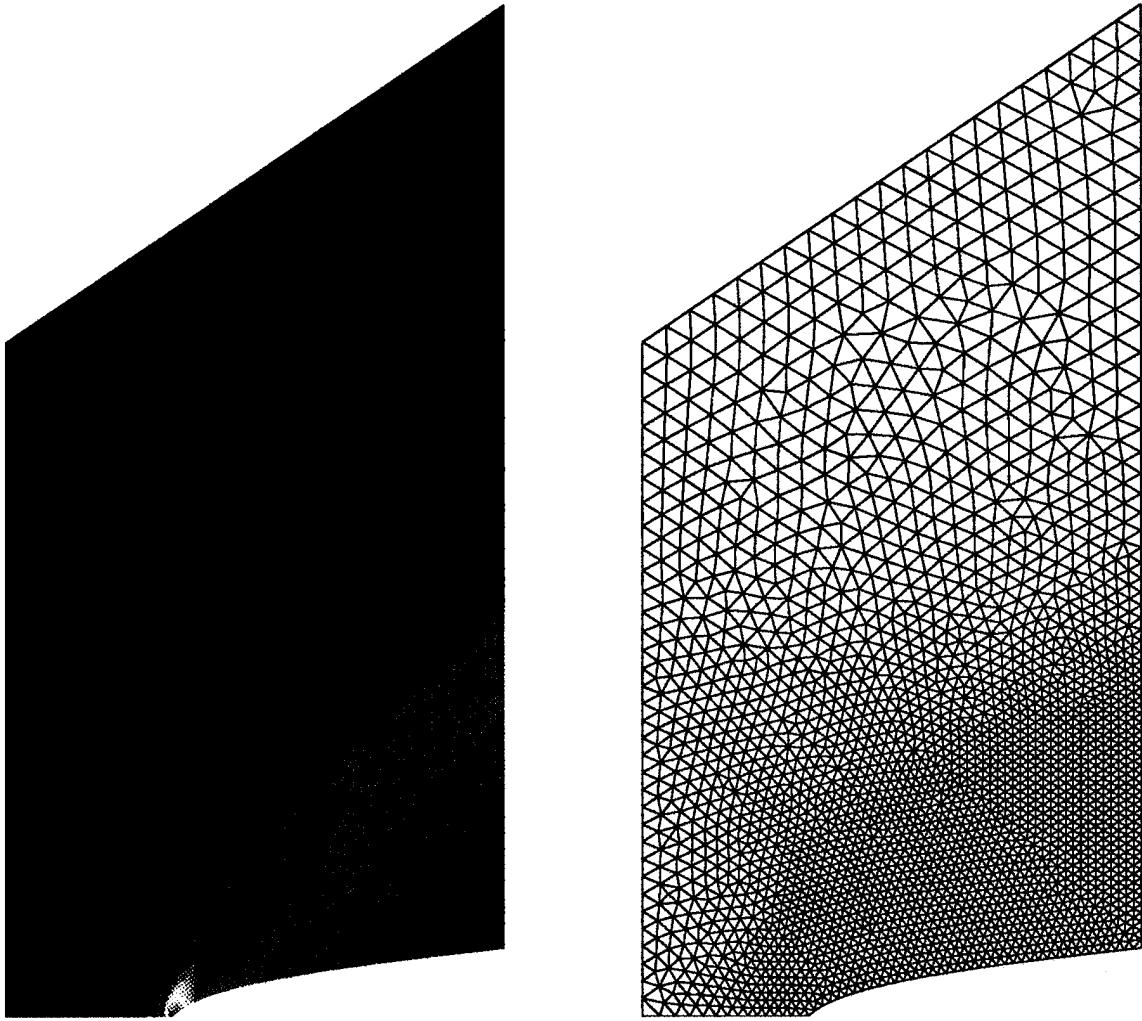


Figure 1: Typical flow and mesh for the forebody simulator on an unstructured mesh.

## NO Mass Fraction Sensitivity to Free-Stream Velocity

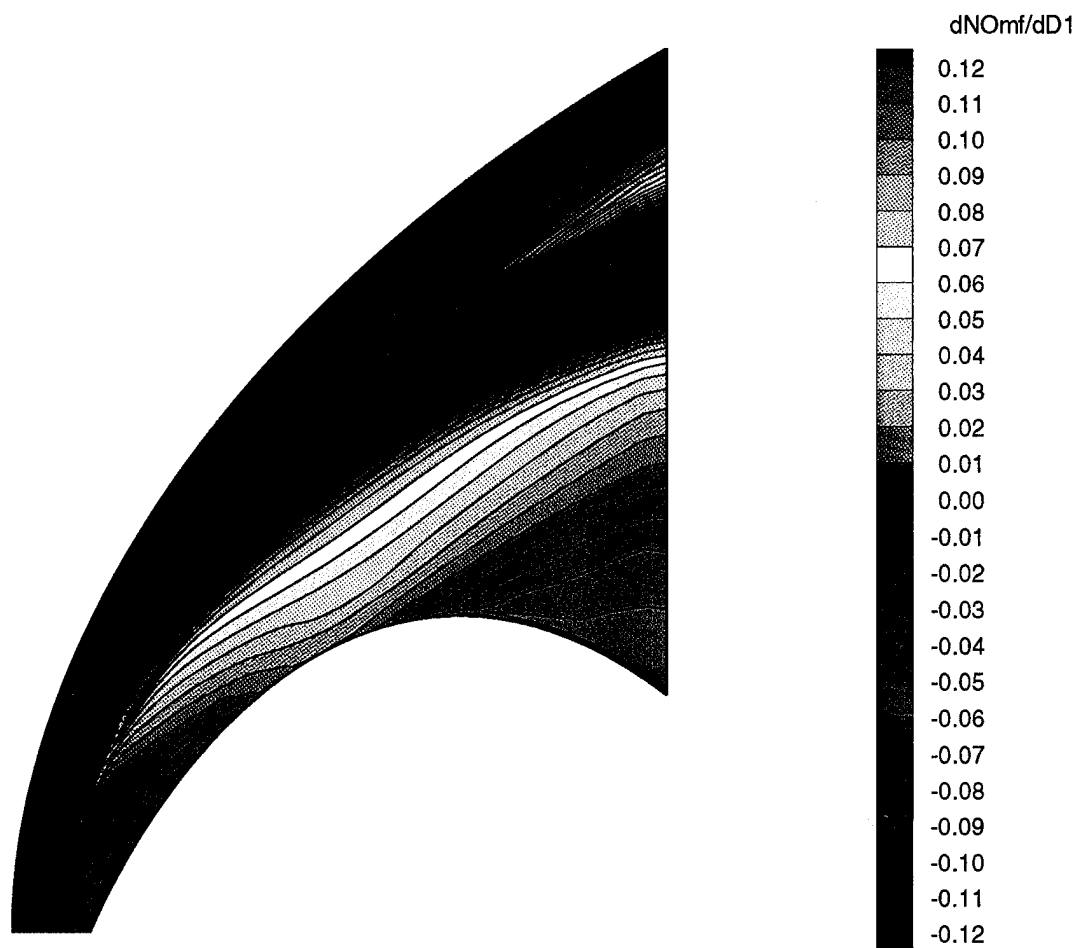


Figure 2: Sensitivity of NO fraction